



Wire Fence Solutions

Complete fencing solutions for installation,
maintenance & repair



- Bracing
- Terminating
- Tensioning
- Repairing


Fencing Solutions


As the market leader in wire joining and tensioning, Gripple is renowned for providing innovative, cost-effective solutions for fencing applications. Gripple fencing products replace traditional methods, generating time and labor savings. Our range of products work with a wide variety of low-carbon and high tensile fencing wires.

Gripple Plus Range
Page 4



T-Clip
Page 6

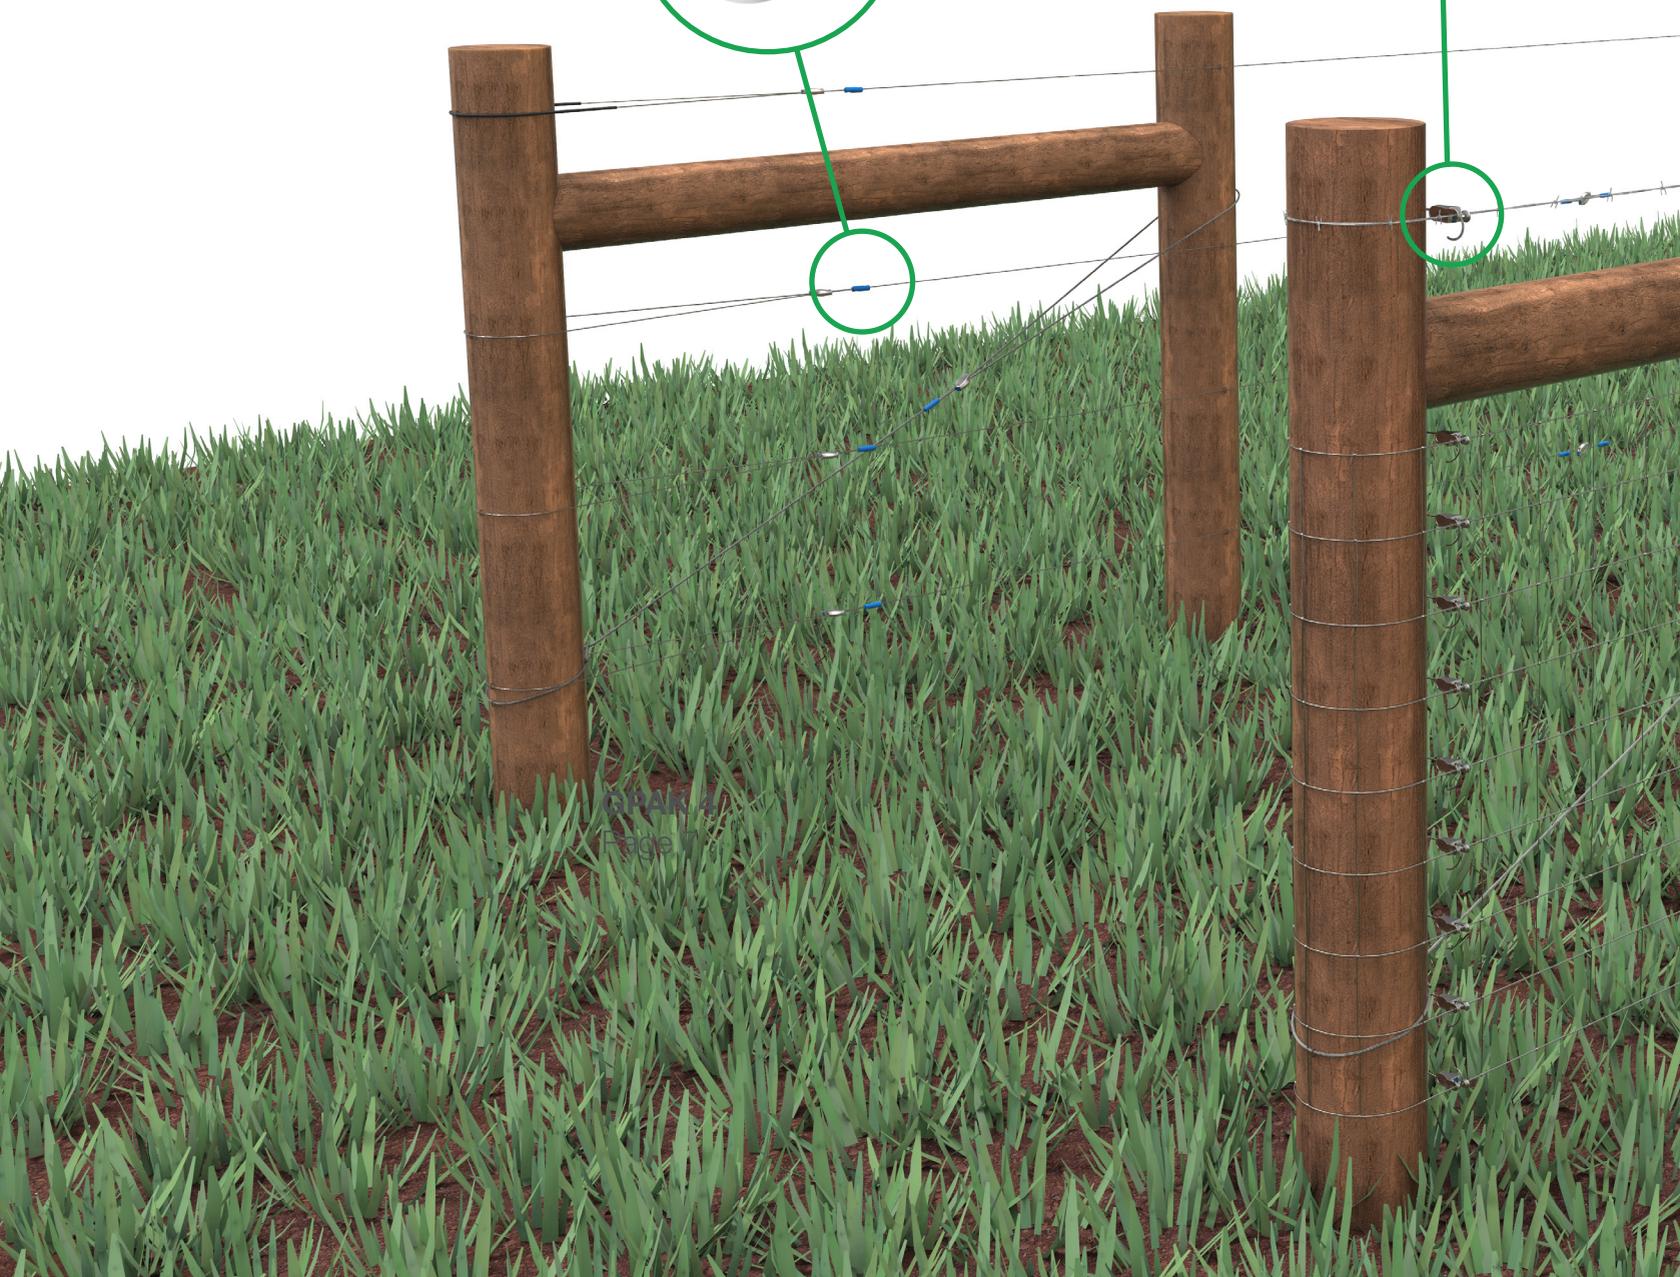

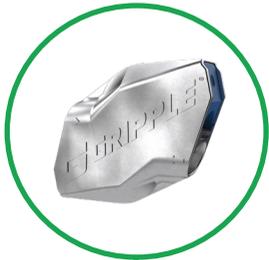

Barbed
Page 5



Tools & Accessories
Page 9




GPAK
Page 7

Gripple Plus Range

The Gripple Plus range of wire joiners / tensioners are suitable for all wire fencing applications.

- Joining and tensioning ability in one
- Eliminates tying and knotting wires, reducing installation time
- Ideal for use on high tensile and low-carbon trellis wire
- Designed for high loads and corrosion resistance
- Easily re-tensioned year-after-year
- Available in Small, Medium, and Large for various wire gauges

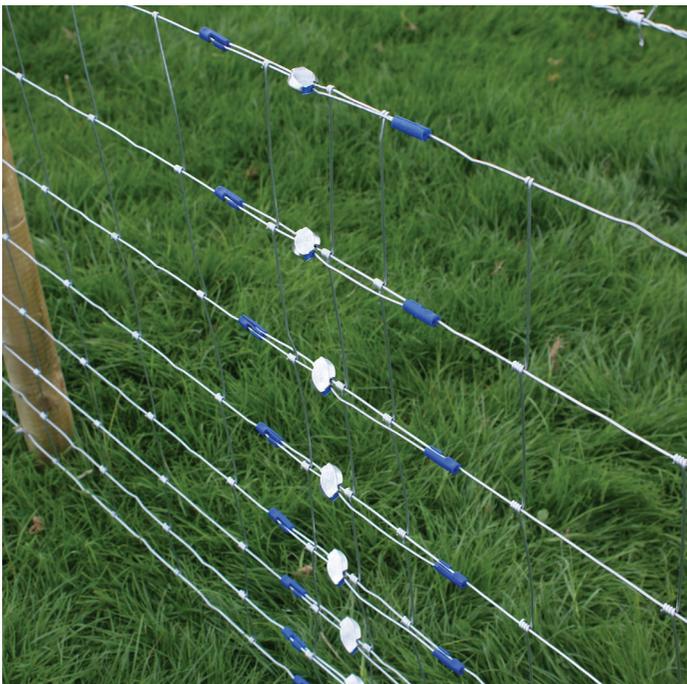

Gripple Plus Medium - Stock fence repair.



Gripple Plus Medium - Loop format end post termination.

Product	Wire Type	Standard Wire Gauge	Recommended Working Load
Gripple Plus Small	Plain, Field, Electric	17 SWG - 14 SWG	660 lbs
Gripple Plus Medium	Plain, Field, Electric	13.5 SWG - 10 SWG	880 lbs
Gripple Plus Large	Plain, Field, Electric	10 SWG - 7½ SWG	1,320 lbs

Gripple Barbed

The Gripple Barbed takes the hassle out of joining and knotting barbed wire, creating a secure installation.

- Eliminates tying and knotting wires, reducing installation time
- Joining and tensioning ability in one
- Easily re-tensioned year-after-year
- Ideal for use on high tensile and low-carbon wire
- High grade ceramic roller for corrosion resistance
- Gripple Barbed and Gripple Plus Medium are both compatible with barbed wire (see chart below)



Barbed - On low-carbon 12.5 gauge barbed wire



Barbed - Enclosing cattle

Product	Wire Type	Standard Wire Gauge	Recommended Working Load
Gripple Barbed	Low-carbon barbed	2 x 12½ swg	880 lbs
Gripple Plus Medium	High tensile barbed	15.5 swg	880 lbs

T-Clip

The Gripple T-Clip securely fastens fencing wire at an end post. Simple installation without the need to tie or knot wire.

- Eliminates tying and knotting wires, reducing installation time
- No need to cut and remove vertical wire
- The twist on action provides a secure termination
- High grade ceramic roller for corrosion resistance
- Two sizes available for both stock fencing or barbed wire applications



T-Clip 1 - Installed on a stock fence.



T-Clip 2 - Used to terminate barbed wire..

Product	Wire Type	Standard Wire Gauge
T-Clip 1	Plain wire	15 SWG - 10 SWG
	High tensile barbed	2 x 15½ SWG
T-Clip 2	Plain, Field, Electric	10 SWG - 7½ SWG
	Low-carbon barbed	2 x 15 SWG - 2 x 12½ SWG

Load dependent on accompanying Gripple Plus or Gripple Barbed tensioner. Never tension T-Clip directly.

GPAK

The GPAK Bracing Kit is supplied as a ready-to-use kit containing a pre-cut, fused length of cable and a Grippler joiner/tensioner.

- Suitable for wooden and metal post bracing
- High load capacity
- Easily re-tensioned year-after-year
- Manufactured with zinc aluminum cable for corrosion resistance
- Consistent, professional finish



GPAK 6 - Installed as an H-Post brace



GPAK 4 - Bracing the end of a fencing run

Product	Cable Diameter	Cable Length	Recommended Working Load
GPAK 4	5/32 in	16 ft	1,320 lbs.
GPAK 5	3/16 in	18 ft	2,200 lbs
GPAK 6	1/4 in	18 ft	3,850 lbs

Anchor

The Gripple Anchor creates a secure, fixed anchoring point underground. No pre-digging required, which drastically reduces installation time.

- Designed for drive efficiency and maximum load capacity
- Suitable for a variety of soil types
- Quick to install
- Drive tool eliminates damage to anchor
- Saves time and labor



Product	Cable Diameter	Cable Length
Anchor 3	5/32 in	4 ft
Anchor 4	1/4 in	4 ft

Load is dependent on the soil quality.

Anchoring Tools

Gas Powered Driver



The Gas Powered Driver provides quick installation of up to 4 in. diameter fence posts and Gripple's range of anchors. Weighing only 35 lbs, it is lightweight and portable.

Drive Rod



The Drive Rod is designed specifically to work with Gripple's range of anchors. The tools are available in 4 ft. and 6 ft. lengths dependent on the depth of the ground anchor installation.

Tools & Accessories

Setting Key



The Setting Key allows Gripple tensioners to be repositioned on the wire before tension is applied. To use, simply insert the key into the small hole adjacent to the main channel, releasing the roller and allowing the Gripple to move freely.

Twister



The Gripple Twister secures tail wires. Making the installation completely safe and hazard free, it gives a tidy and neat finish. Use on mild steel or high tensile wire.

Contractor Tool



The all-metal Contractor Tool is strong, robust and built to withstand everyday wear and tear. Tension is easily applied to Gripple tensioners to tighten the fencing wire.

Torq Tool



The Torq Tool is lightweight, compact, and works with all sizes of Gripple Plus joiners to tension the fence wire. Designed with a built-in-gauge, the tool measures the tension you wish to apply.

Wire & Cable Cutters



Wire Cutters are suitable for cutting high tensile wire, and are available in Small or Large for different wire gauges.

Gripple Work Belt



The Gripple Work Belt is the perfect accessory for carrying Gripple products and fencing tools.

Find Your Wire Solution


Use our guide to match your wire with the correct Gripple product.

Wire Type	Wire Range	Gripple Plus Small	Gripple Plus Medium	Gripple Plus Large	Gripple Barbed	GPAK 4	GPAK 5	GPAK 6	T-Clip 1*	T-Clip 2*	Recommended Working Load
Plain wire / Field fence (pre-fab) / Electric fence	17 SWG - 15 SWG	✓									660 lbs
	15 SWG - 14 SWG	✓							✓		660 lbs
	13.5 SWG - 10 SWG		✓						✓		880 lbs
	10 SWG - 7½ SWG			✓						✓	1,320 lbs
Low-carbon Barbed	2 x 12½ SWG				✓					✓	880 lbs
Bracing	5/32 in. x 16 ft					✓					1,320 lbs
	3/16 in. x 18 ft						✓				2,200 lbs
	1/4 in. x 18 ft							✓			3,850 lbs

* Load dependent on accompanying Gripple Plus or Gripple Barbed tensioner. Never tension T-Clip directly.


Technical Advice & Installation

Gripple Plus range and Gripple Barbed - Installation (featuring Setting Key adjustment)

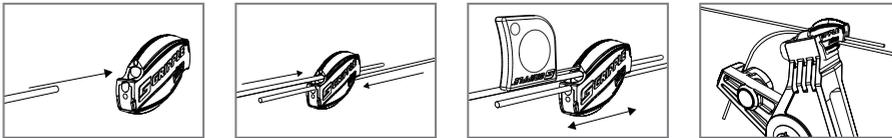


- Apply and re-apply tension with a Gripple Tensioning Tool (leave at least 3 in. tail wire)
- Reposition before applying tension using a Setting Key

Gripple Plus range - Join and tension stock fence

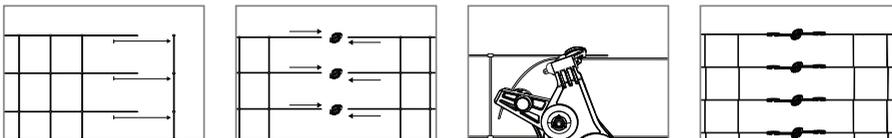


- Remove sufficient verticals prior to installation
- Trim excess wire with Wire Cutters, leaving a tail the size of the width of your hand to enable re-tensioning

T-Clip - Installation

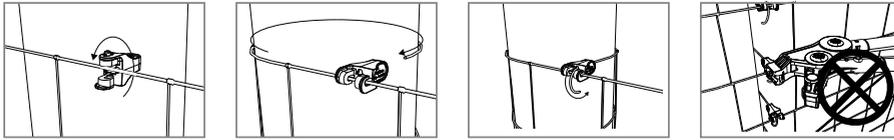


- On field fence, install the T-Clip as close to the end post as possible, inside the closest vertical
- Hand fasten T-Clip, never tension directly with Tensioning Tool
- For close to ground installations, install T-Clip upside down and bend wire upward.

Twister - Installation

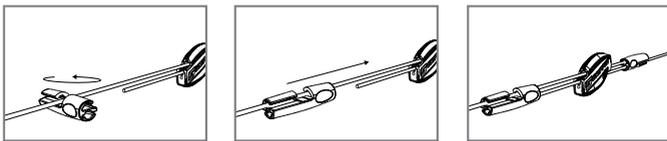


- With all Gripple joiner / tensioners, always leave at least 3 in. wire to allow for re-tensioning
- A Twister tidies tail wires and can be removed and re-attached to allow for re-tensioning

GPAK - Installation

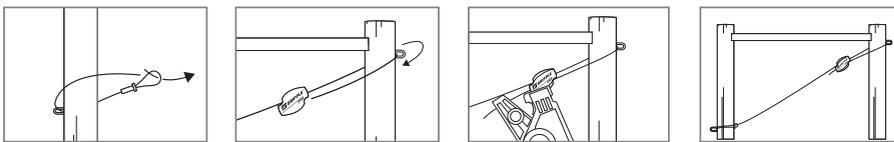


Best Practice

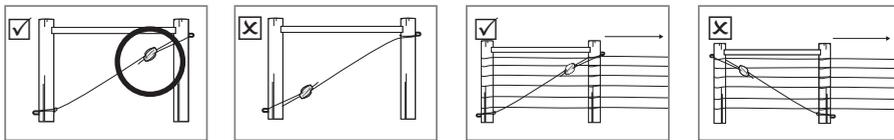

- Always 'choke' the cable tightly against the bottom of the post to avoid animals getting caught in the fence
- Coupling a GPAK with an Anchor will secure your fence, where space is limited

Anchor - Installation

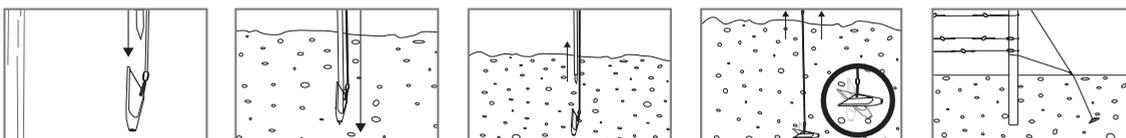

- Always drive the Anchor fully into the ground, to a depth of at least 3 ft.
- For even quicker installation of Gripple's Anchors, use the Gas Powered Driver

www.gripple.com

grippleinc@gripple.com

Gripple Inc

1611 Emily Lane
Aurora
Illinois 60502
USA

T | +1 866 474 7753

F | +1 800 654 0689

E | grippleinc@gripple.com

Gripple Inc (Canada)

7015 Ordan Drive
Unit #15 Mississauga
Ontario L5T 1Y2
CAN

T | +1 905 458 8700

F | +1 800 654 0689

E | CAinfo@gripple.com

Gripple Ltd (Headquarters)

The Old West Gun Works
Savile Street East
Sheffield S4 7UQ
UK

T | +44 (0) 800 018 4264

F | +44 (0) 114 275 1155

E | info@gripple.com

Gripple Europe SARL

1, rue du commerce
BP 37
67211 Obernai Cedex
France

T | +33 (0)3 88 95 44 95

F | +33 (0)3 88 95 08 78

E | frinfo@gripple.com

Gripple India

B 95/2
Naraina Industrial Area
Phase I
New Delhi-110028

T | +91 11-40582703

F | +91 11-40582703

E | ininfo@gripple.com

For installation videos on our Fencing Range please visit: www.gripple.com/fencing-tips

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.

WE ARE SOCIAL
FOLLOW OUR UPDATES



© 2019 Gripple

Gripple is a registered trademark of Gripple Limited,
Company registered in England No. 1772901, VAT Reg No. GB 600 1951 88

BROC-FEN-US

Published April 2019

Please refer to www.gripple.com for
the most up to date user advice and
product information.